




METRIC



Rotor design with high mass of inertia and blow bars designed for a longer lifetime

Its award winning ground breaking design and innovative technology, like the sustainable zero-emission plug-in electric drive system, high safety standards and the powerful and functional design makes this compact impactor a winner in its class.

Asymmetric inlet to avoid blockage

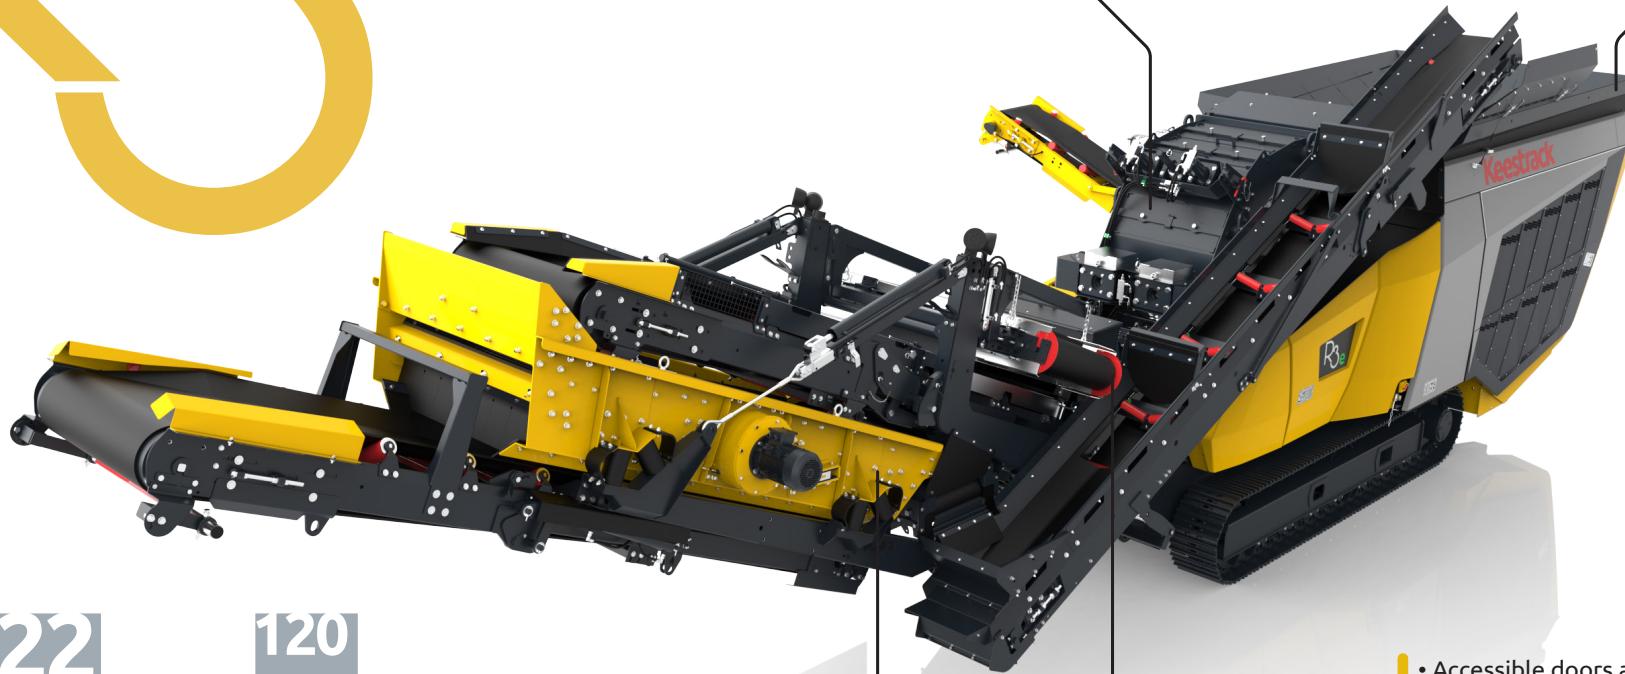

28
t/h

Diesel-hydraulic

22
t/h

Diesel-electric

120
kWh

Electric plug-in
mains

Applications

Limestone and many other low and medium abrasive natural rock
Concrete and landfill recycling
Primary and secondary crushing
Yard clean up
Construction & Demolition waste
Quarrying and mining
Gravel
Asphalt
Coal
And others

Single or double deck
after screen

Liftable magnetic separator

- Accessible doors and panels on all sides of the machines for maintenance and repair
- Pre-screening via crusher bypass or stockpiled
- All drive drums and return drums of belt conveyors are greased for life

TECHNICAL SPECIFICATIONS	
Capacity up to	250 t
Weight	27,5 t
Weight incl. single deck after screen	30 t
Weight incl. double deck after screen	33,2
Inlet opening	770 x 960 mm
Hopper	3,5 m³
Feed hopper in HB450 and wear lining in HB 450 & 500	•
Hydraulic foldable hopper walls	/
Loading height	3200 mm
	Loading width (back) 2400 mm
	Side loading length 3450 mm right, 2750 mm left
	Wear lining HB 450 welded/ HB 500 bottom
Vibrating Feeder with pre-screen, l x w	3700 mm x 920 mm
Pre-screen scalper, l x w	1200 mm x 920 mm
Screened fraction either in crusher bypass or separately stockpiled (option)	•
Vibrating feeder, l x w	n/a
Independent vibrating Double Deck pre-screen	n/a
Double deck pre-screen, l x w top deck	n/a
Double deck pre-screen, l x w bottom deck	n/a
Under screen conveyor: Reversible, to crusher bypass or to side conveyor	/
Fine fraction either in crusher bypass or separately stockpiled (option)	n/a
Intermediate fraction in crusher bypass	n/a
Intermediate fraction either in crusher bypass or separately stockpiled (option)	n/a
Turnable heavy duty bar for edge protection in inlet	•
Impact Crusher	
Weight of impact crusher (excl. milling beam)	8,5 t
Inlet opening	770 x 960 mm
Rotor width	920 mm
Rotor diameter	1100 mm
Rotor weight (excl. Bearings)	3,2 t
Impact aprons	2 pcs
Hydraulic release system inlet area via remote control	•
Hydraulic setting of aprons, turning spindle for fixation of the back stop.	•
Spring force adjustments and shiming plates fixation"	
Standard access to crusher house	right side
Vibrating discharge feeder (l x w)	/
Main conveyor belt (l x w) & (discharge height)	8100 mm x 1000 mm (3310 mm)
Main conveyor belt height adjustable at discharge and lowerable mechanism	•
Main conveyor hydraulic foldable for transport	•
Track-unit: Length, total width, track shoe width	3310, 2300, 400 mm
2-speed track drive	1,1 km/h and 2 km/h
Drop-off engine	/
Engine unit(s), indication, sometimes more optional engines	202 kW @ 1500 RPM, 222 kW @1800 RPM
Control	PLC – IP 67 LCD screen 7" & remote control
Smart sequential auto start/stop from remote control	•
Safety protection with special key system, emergency stops, machine stop at remote, protected doors during operation and other safety features	•
All drive drums and return drums of belt conveyors are greased for life	•
Patented tilting chassis for increased maintenance access and to increase feed capacity if needed	/
Available drive systems	
	Diesel/hydraulic drive •
	Rotor direct driven by engine, electric driven components /
	e-drive Diesel/hybrid, electric plug-in & plug-out •
	ZERO drive (no combustion engine, plug-in electric) •

OPTIONS

Feeding , pre-screen & crushing		
Hopper extensions		5 m³
Screen media pre-screen	Range of punched plates, screen plates and Zig zag-shaped or blind plate	
Stockpiling Side belt conveyor from pre-screen l x w (discharge height)		3900 x 500 mm (2595 mm)
Milling beam		•
Deviation plates		•
Several quality blow bars		•
Swiveling arm and hoist to change blow bars		•
Frequency inverter for crusher drive on e-version		•
After screen		
Single deck after screen: l x w, incl oversize, recycling and fines conveyor		3100 x 1400 mm
Oversize stockpile conveyor l x w (discharge height)		4400 x 500 mm (2520 mm)
2- deck after screen: incl oversize, recycling and fines conveyor for closed circuit processing. After screen unit can be disassembled easy by fast connectors and can be placed on support legs		•
Top deck, l x w		3100 x 1400 mm
Bottom deck, l x w		3100 x 1400 mm
Screen media after screen		Wire mesh / square mesh / Harp screen
Middle fraction stockpile conveyor, l x w (discharge height)		6000 x 500 mm (3036 mm)
Fines conveyor, l x w (discharge height)		4200 x 1000 mm (3100 mm)
Swiveling recycling conveyor can be used as recycling conveyor (closed circuit) / stockpile conveyor oversize fraction (hydraulic foldable)		/
Walkways besides the screen box		/
Other options		
Wheeled dolly		/
Dust suppression system at crusher inlet and outlet or at end of main and fines conveyor		•
Height adjustable magnet separator on main conveyor		•
Wind sifter (air knife) for oversize fraction		•
Dust cover main conveyor / fines conveyor		/
Volumetric belt scale		•
Radio remote, several options		•
Fuel filling pump		•
Central greasing system		•
Working lights		•
Telematics system UMTS/GPS		•
Heating system for engine		•
Lifting eyes		•

TRANSPORT	
Transport l x w x h (mm)	10000 x 2550 x 3200 mm
Transport l x w x h (mm) 1-deck	12900 x 2550 x 3200 mm
Transport l x w x h (mm) 2-deck	13260 x 2550 x 3200 mm

LEGENDA	
	• applicable - available
	/ not applicable- not available




IMPERIAL

Rotor design with high mass of inertia and blow bars designed for a longer lifetime

Its award winning ground breaking design and innovative technology, like the sustainable zero-emission plug-in electric drive system, high safety standards and the powerful and functional design makes this compact impactor a winner in its class.

Asymmetric inlet to avoid blockage

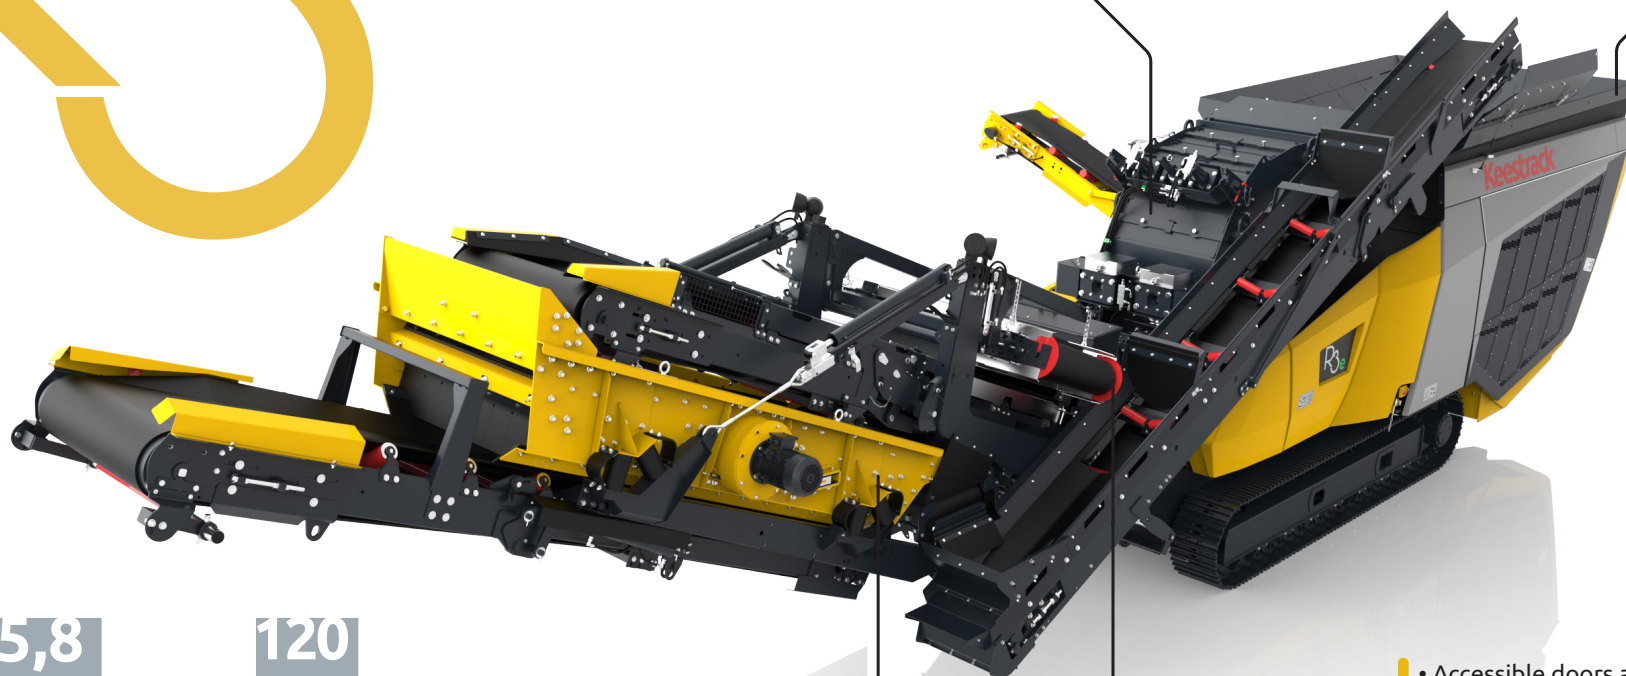

Single or double deck after screen

Liftable magnetic separator

7,4

US Gal/h

Diesel-hydraulic

5,8

US Gal/h

Diesel-electric

120

kWh

Electric plug-in
mains

Applications

Limestone and many other low and medium abrasive natural rock

Concrete and landfill recycling

Primary and secondary crushing

Yard clean up

Construction & Demolition waste

Quarrying and mining

Gravel

Asphalt

Coal

And others

- Accessible doors and panels on all sides of the machines for maintenance and repair
- Pre-screening via crusher bypass or stockpiled
- All drive drums and return drums of belt conveyors are greased for life

Keestrack

TECHNICAL SPECIFICATIONS	
Capacity up to	275 sT
Weight	30 sT
Weight incl. single deck after screen	33 sT
Weight incl. double deck after screen	36 sT
Inlet opening	30" x 38"
Hopper	4,5 yard ³
Feed hopper in HB450 and wear lining in HB 450 & 500	•
Hydraulic foldable hopper walls	/
Loading height	10'6"
	Loading width (back) 7'10"
	Side loading length 11'3" right, 9' left
	Wear lining HB 450 welded/ HB 500 bottom
Vibrating feeder with pre-screen, l x w	12'2" x 3'
Pre-screen scalper, l x w	3'11" x 3'
Screened fraction either in crusher bypass or separately stockpiled (option)	•
Vibrating feeder, l x w	n/a
Independent vibrating Double Deck pre-screen	n/a
Double deck pre-screen, l x w top deck	n/a
Double deck pre-screen, l x w bottom deck	n/a
Under screen conveyor: Reversible, to crusher bypass or to side conveyor	/
Fine fraction either in crusher bypass or separately stockpiled (option)	n/a
Intermediate fraction in crusher bypass	n/a
Intermediate fraction either in crusher bypass or separately stockpiled (option)	n/a
Turnable heavy duty bar for edge protection in inlet	•
Impact Crusher	
Weight of impact crusher (excl. milling beam)	9 sT
Inlet opening	30" x 38"
Rotor width	3'
Rotor diameter	3'8"
Rotor weight (excl. Bearings)	3,5 sT
Impact aprons	2 pcs
Hydraulic release system inlet area via remote control	•
Hydraulic setting of aprons, turning spindle for fixation of the back stop.	•
Spring force adjustments and shimming plates fixation"	
Standard access to crusher house	right side
Vibrating discharge feeder (l x w)	/
Main conveyor belt (l x w) & (discharge height)	26'7" x 3'3" (10'10")
Main conveyor belt height adjustable at discharge and lowerable mechanism	•
Main conveyor hydraulic foldable for transport	•
Track-unit: Length, total width, track shoe width	10'10", 7'7", 1'2"
2-speed track drive	0,7 and 1,2 mph
Drop-off engine	/
Engine unit(s), indication, sometimes more optional engines	202 kW @ 1500 RPM, 222 kW @1800 RPM
Control	PLC – IP 67 LCD screen 7" & remote control
Smart sequential auto start/stop from remote control	•
Safety protection with special key system, emergency stops,	•
machine stop at remote, protected doors during operation and other safety features	
All drive drums and return drums of belt conveyors are greased for life	•
Patented tilting chassis for increased maintenance access and to increase feed capacity if needed	/
Available drive systems	
	Diesel/hydraulic drive •
	Rotor direct driven by engine, electric driven components /
	e-drive Diesel/hybrid, electric plug-in & plug-out •
	ZERO drive (no combustion engine, plug-in electric) •

OPTIONS

Feeding , pre-screen & crushing	
Hopper extensions	6,5 yard ³
Screen media pre-screen	Range of punched plates, screen plates and Zig zag-shaped or blind plate
Stockpiling Side belt conveyor from pre-screen l x w (discharge height)	12'10 x 1'8" (8'6")
Milling beam	•
Deviation plates	•
Several quality blow bars	•
Swiveling arm and hoist to change blow bars	•
Frequency inverter for crusher drive on e-version	•
After screen	
Single deck after screen: l x w, incl oversize, recycling and fines conveyor	10'2" x 4'8"
Oversize stockpile conveyor l x w (discharge height)	14'5" x 1'8" (8'3")
2- deck after screen: incl oversize, recycling and fines conveyor for closed circuit processing.	
After screen unit can be disassembled easy by fast connectors and can be placed on support legs	•
Top deck, l x w	10'2" x 4'8"
Bottom deck, l x w	10'2" x 4'8"
Screen media after screen	Wire mesh / square mesh / Harp screen
Middle fraction stockpile conveyor, l x w (discharge height)	19'8" x 1'8" (10')
Fines conveyor, l x w (discharge height)	13'9" x 3'3" (10'2")
Swiveling recycling conveyor can be used as recycling conveyor (closed circuit) / stockpile conveyor oversize fraction (hydraulic foldable)	/
Walkways besides the screen box	/
Other options	
Wheeled dolly	/
Dust suppression system at crusher inlet and outlet or at end of main and fines conveyor	•
Height adjustable magnet separator on main conveyor	•
Wind sifter (air knife) for oversize fraction	•
Dust cover main conveyor / fines conveyor	/
Volumetric belt scale	•
Radio remote, several options	•
Fuel filling pump	•
Central greasing system	•
Working lights	•
Telematics system UMTS/GPS	•
Heating system for engine	•
Lifting eyes	•

TRANSPORT	
Transport l x w x h	32'10" x 8'4" x 10'6"
Transport l x w x h 1-deck	42'4" x 8'4" x 10'6"
Transport l x w x h 2-deck	43'6" x 8'4" x 10'6"

LEGENDA	
•	applicable - available
/	not applicable- not available

