


1822PH

SERIES 1800 SCREENING/WASHING PLANT

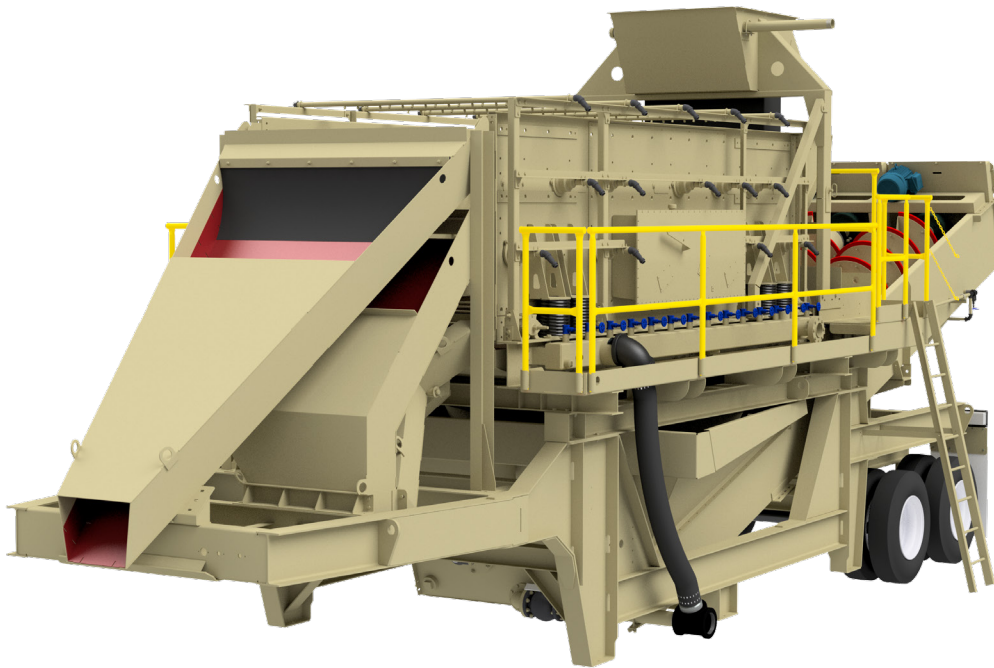

Screen

KPI-JCI 6' x 16', 3-deck horizontal wet vibrating screen

- V-belt drive assembly with 40-HP, 1200 RPM motor
- Huck-bolted assembly
- 1/4" plate steel side plates
- 160-mm double-roll spherical self-aligned bearings
- Triple shaft vibrating mechanism complete with keyless hold-fast hub locking assembly
- Oval motion stroke pattern
- Adjustable stroke amplitude (3/8" - 5/8")
- Adjustable stroke angle (30° - 60° in 5° increments)
- Adjustable speed via adjustable motors heave (675 - 875 RPM)
- Fully contained oil splash lubrication system
- Bolt-on tailgates, 24" feedbox and 4" discharge lips
- Steel coil springs
- Side tension draw bar screen cloth retention system (screen cloth is optional)

Fine Material Washer

KPI-JCI Model 5036-25T (36" twin) fine material washer

- Tank is of 3/16" (sides and bottom) and 3/8" (rear end plate) welded plate steel construction and includes a curved bottom with integral rising current manifold (4" dia. inlet)
- Large undisturbed pool area with adjustable weir boards and overflow flume with 10" dia outlet
- Double pitch, solid flight spiral assembly with standard AR steel inner wear shoes and standard urethane outer wear shoes
- Greaseable, externally mounted Dodge Imperial E tail end flange bearing; greaseable Dodge pillow block head end bearing
- Lower end seal - chrome plated stainless steel wear sleeve, water tight bellows type rubber seal and secondary grease seal
- High efficiency v-belt drive assembly (one drive assembly per spiral) includes 15-HP TEFC motor and Dodge TA-II double reduction shaft mount reducer
- Tapered discharge chute set at 45° angle to grade

See Model 5036-25T Spec Sheet for additional information

Chassis

- Heavy duty 12" I-beam construction
- Tandem walking beam axle arrangement with dual Dana 22,000# axles and eight (8) 11:00 x 22.5 tires
- Fifth wheel king pin, air brakes, travel lights, mudflaps and cribbing locations

Water System

- All fresh water plumbing to a single 6" inlet located near the tail end of the fine material washer
- Fine material washer manifold includes a 4" butterfly valve, 4" swing check valve and pressure gauge
- 1" chase water plumbing with gate valves
- Screen manifold with flow control valves for each spray bar
- Fourteen (14) spray bars each with nineteen (19) 10.0 gpm (@ 40 psi) spray nozzles
- 3" connection on the screen manifold for the optional feed box

Screen Chutes / Fines Hopper

- 3/16" A36 welded plate steel construction
- Chutes allow for positioning of three (3) radial stackers under the chutes
- Fines hopper transitions to form the feed box and baffle plate of the 36" twin fine material washer

Access

- 28-1/2" wide access platform with 1-1/2" OD handrails and toeboards across the feed end of the screen
- 19" wide access platform with 1-1/2" OD handrails and toe boards along both sides of the screen
- Ladder access from grade which can be located on either side of the plant

Optional Equipment

- AR or urethane chute and hopper wear liners
- Fold-down feed box with winch and header pipes
- Wire mesh or urethane screen media
- Electrical package
- Blending gates
- Landing gear
- Hydraulic run-on jacks with electric or gas power pack
- Swing-away top and middle deck over chutes
- Cross conveyors
- Remote grease package

Physical/Operating Characteristics

Dimension	Standard	Metric
Feed Material Size	- 6"	- 152.4mm
Approx. Capacity	400 TPH	363 MTPH
Water Requirements Up To	1,200 gpm	273 m ³ /h
Travel Length Overall	41'3"	12.57m
Travel Length King Pin to Axle	29'5"	8.97m
Travel Width	12'	3.66m
Travel Height	13'10"	4.22m
Operating Length Overall	41'3"	12.57m
Operating Width	12'9"	3.89m
Operating Height without Feed Box	13'10"	4.22m
Operating Height with Feed Box	16'7"	5.05m
King Pin Load	22,840 lbs.	101.60 kN
Axle Load	34,920 lbs.	155.33 kN
Overall Load	57,760 lbs.	256.93 kN



Kolberg-Pioneer, Inc.
700 West 21st Street,
Yankton, SD 57078
1 (800) 542-9311
mail@kpijci.com
www.kpijci.com

NOTE: CONSULT FACTORY FOR EXACT DIMENSIONS, specifications are subject to change without notice.

Because Kolberg-Pioneer, Inc., Johnson Crushers International, Inc. and Astec Mobile Screens, Inc. may use in their catalog and literature, field photographs of their products which may have been modified by the owners, products furnished by Kolberg-Pioneer, Inc., Johnson Crushers International, Inc. and Astec Mobile Screens, Inc. may not necessarily be as illustrated therein. Also continuous design progress makes it necessary that specifications be subject to change without notice. All sales of the products of Kolberg-Pioneer, Inc., Johnson Crushers International, Inc. and Astec Mobile Screens, Inc. are subject to the provisions of their standard warranty. Kolberg-Pioneer, Inc., Johnson Crushers International, Inc. and Astec Mobile Screens, Inc. do not warrant or represent that their products meet any federal, state, or local statutes, codes, ordinances, rules, standards or other regulations, including OSHA and MSHA, covering safety, pollution, electrical wiring, etc. Compliance with these statutes and regulations is the responsibility of the user and will be dependent upon the area and the use to which the product is put by the user. In some photographs, guards may have been removed for illustrative purposes only. This equipment should not be operated without all guards attached in their normal position. Placement of guards and other safety equipment is often dependent upon the area and how the product is used. A safety study should be made by the user of the application, and, if required additional guards, warning signs and other safety devices should be installed by the user, wherever appropriate before operating the products.

Rev: 4/19